



SERVICE BULLETIN


BULLETIN # 07-04
DATE: 7/07/2004
SUBJECT: 48 CONVERTIBLE
Generator Fuel line
HULL #s: #31 to #60

It has recently come to our attention the fuel return line from the generator may come in contact with the Belt-Pulley system on the front of the generator engine. This contact will cause severe damage to the fuel line, resulting in a major fuel leak.

In order to remove this potential for damage, the fuel line should be relocated. This is accomplished by following the directions below. This service must be performed with the generator turned shut OFF, and the generator battery switch in the OFF position.

1. Remove the aft side generator hush cover panel.
2. Move the blue fuel hose to the location shown in Figure 1.
3. Secure the fuel line to the generator cooling hose with a small wire-tie. Do not over tighten the wire-tie, or damage to the cooling line may occur. The fuel line does not need to be disconnected during this process; there is sufficient slack in the fuel line.
4. Reinstall the generator hush-cover panel.

MOVE FUEL LINE HERE, AND SECURE WITH WIRE-TIE

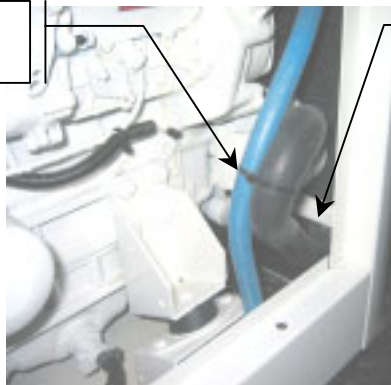

ORIGINAL FUEL LINE LOCATION

Estimated time to complete this modification is 5 minutes.